



Electro-Optics Technology, Inc.

# Innovative High Quality Laser Solutions

## HIGH SPEED

## Photodetectors



EOT's High Speed Photodetectors contain PIN photodiodes that utilize the photovoltaic effect to convert optical power into an electrical current.

When terminated into 50 Ω into an oscilloscope, the pulsewidth of a laser can be measured. When terminated into 50 Ω into a spectrum analyzer, the frequency response of a laser can be measured.

EOT's High Speed Photodetectors come with their own internal bias supply consisting of long-life lithium cells. Plugging a coaxial cable into the photodetector's SMA output connector and terminating into 50 Ω at the oscilloscope or spectrum analyzer is all that is required for operation.

### FEATURES

- Small footprint
- Internal voltage bias
- DC to 22 GHz

### OPTIONS

- External wall plug-in power supply available
- Fiber-coupled or free space options available
- Detector Material

### APPLICATIONS

- Monitoring the output of Q-switched lasers
- Monitoring the output of mode-locked lasers
- Monitoring the output of externally modulated CW lasers
- High frequency, heterodyne applications
- Time domain and frequency response measurements



Electro-Optics Technology, Inc.

# Innovative High Quality Laser Solutions

## SPECIFICATIONS

Part No. (Model)	120-10058-0001 (ET-3500)	120-10068-0001 (ET-3500F)	120-10071-0001 (ET-4000)	120-10081-0001 (ET-4000F)	120-10105-0001 (ET-5000)	120-10104-0001 (ET-5000F)	120-10140-0001 (ET-3600)	120-10142-0001 (ET-3600F)
<b>Detector Material</b>	InGaAs	InGaAs	GaAs	GaAs	InGaAs	InGaAs	InGaAs	InGaAs
<b>Rise Time/Fall Time</b>	<25 ps/<25 ps	<25 ps/<25 ps	<30 ps/<30 ps	<30 ps/<30 ps	28 ps/28 ps	28 ps/28 ps	16 ps/16 ps	16 ps/16 ps
<b>Responsivity<sup>a</sup></b>	>0.90 A/W at 1300 nm	>0.65 A/W at 1300nm	0.53 A/W at 830 nm	0.38 A/W at 830 nm	1.3 A/W at 2000 nm	0.95 A/W at 2000 nm	>0.70 A/W at 1300 nm	>0.70 A/W at 1300 nm
<b>Power Supply</b>	6 VDC	6 VDC	3 VDC	3 VDC	6 VDC	6 VDC	3 VDC	3 VDC
<b>Bandwidth</b>	>15 GHz	>15 GHz	>12.5 GHz	>12.5 GHz	>12.5 GHz	>12.5 GHz	>22 GHz	>22 GHz
<b>Active Area Diameter</b>	32µm	32 µm	60 µm	60 µm	40 µm	40 µm	20 µm	20 µm
<b>Dark Current</b>	<3 nA	<3 nA	<0.5 nA	<0.5 nA	<1 µA	<1 µA	<1 nA	<1 nA
<b>Acceptance Angle (1/2 angle)</b>	15°	N/A	15°	N/A	20°	N/A	15°	N/A
<b>Noise Equivalent Power<sup>b</sup></b>	20 pW/√Hz at 1300 nm	28 pW/√Hz at 1300 nm	35 pW/√Hz at 830 nm	45 pW/√Hz at 830 nm	15 pW/√Hz at 2000 nm	20 pW/√Hz at 2000 nm	26 pW/√Hz at 1300 nm	26 pW/√Hz at 1300 nm
<b>Maximum Linear Rating CW</b>	10 Mw	10 mW	10 mW	10 mW	3 mA	3 mA	10 mW	10 mW
<b>Mounting (Tapped Holes)</b>	8-32 or M4	8-32 or M4	8-32 or M4	8-32 or M4	8-32 or M4	8-32 or M4	8-32 or M4	8-32 or M4
<b>Output Connector</b>	SMA	SMA	SMA	SMA	SMA	SMA	SMA	SMA
<b>Fiber Optic Connection<sup>c</sup></b>	N/A	FC/UPC, SMF28e	N/A	FC/UPC, SMF28e	N/A	FC/UPC	N/A	FC/UPC, SMF28e


Product specifications are subject to change. All products are RoHS compliant.

<sup>a</sup> Photodetectors have an internal 50 Ω termination. Responsivity data applicable to diode only. Detector output should be determined based on 1/2 the responsivity of that shown on graph.

<sup>b</sup> Noise Equivalent Power (NEP) is determined via open circuit output.

<sup>c</sup> Multi-mode fiber available. May limit bandwidth.

NOTE: All specifications apply for a 50 Ω termination unless otherwise noted.

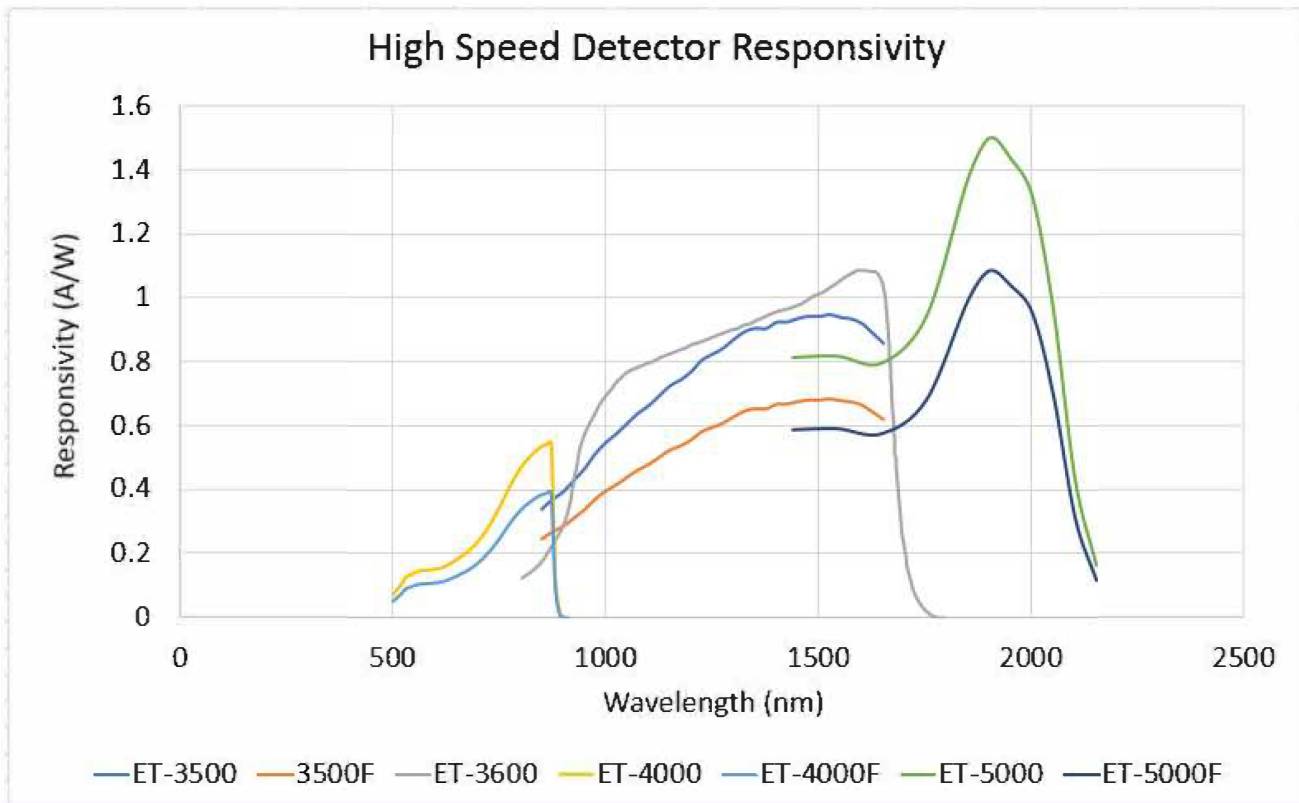

Photonic Solutions Ltd Unit 2.2, Quantum Court, Research Avenue South, HWU Research Park, Edinburgh, EH14 4AP, UK, Tel: +44 (0)131 664 8122  
 Email [sales@photronicsolutions.co.uk](mailto:sales@photronicsolutions.co.uk) Web [www.photronicsolutions.co.uk](http://www.photronicsolutions.co.uk)